


Six Month Maintenance

- Lubricate conveyor table leadscrews and sprockets. (fig 3)
 - Clean the leadscrews, chain, and sprockets with a soft wire brush.
 - Apply 1-2 pumps of grease from a grease gun onto the sprockets and leadscrew threads. Adjust the conveyor up or down to spread the grease thoroughly throughout the mechanisms.

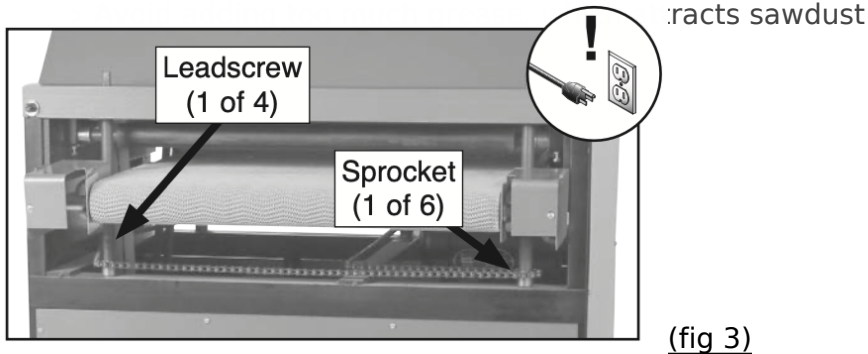

Revision #3

Created 22 March 2025 16:17:13 by Bookstack Admin

Updated 6 April 2025 16:42:13 by Scott Martin